

2020

879123

EAQUA URINAL CONCEALED PRE-INSTALLATION

Concealed pre-installation for Eaquu Urinal plate actuated by infrared sensor, available for all kind of walls

COMPATIBILITY:

- Frames Urinal Sanitarblock
- Plate: Eaquu Urinal

INCLUDED:

- 2 connections for assembling

Package dim.


Weight **0,4 kg**

Pz. Pallet n°

CE EN 14055 CL1


TECHNICAL FEATURES:

- Operating pressure: 0,3-10 bar;
- Flow rate: ca. 20l/min. (3bar);
- Connection: 6V Lithium CRP 2 (standard: life time up to 4 years) / mains power supply 230V/6V; optional when choose Eaquu plate
- Dimensions: 120 X 100 X 66 mm
- Standards: DIN EN 200; CE.
- Required pre-installation

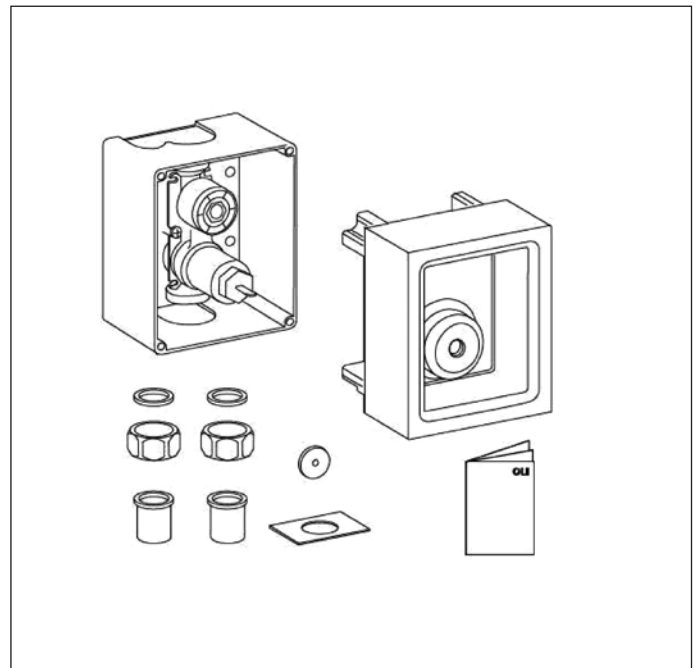

IMPORTANT:

The concealed pre-installation has to be installed before closing the wall

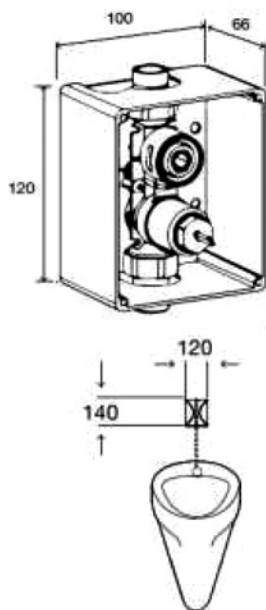

sizes in mm

<http://www.ceramicaflaminia.it/en>

©ceramicaflaminiaspa - All rights reserved. Unauthorized copying, publication, reproduction as well as partial reproduction are prohibited

april 2020

